

ILUTECNIC S.L.


Pol.Ind. Iciar, Parcela 5 Subparcela 2 - nave A-5

Tlf: +34 943 19 91 79, Fax: +34 943 19 91 78


Email: ilutecnic@ilutecnic.com

20829 Iciar - Deba (Gipuzkoa)

Web: www.ilutecnic.com

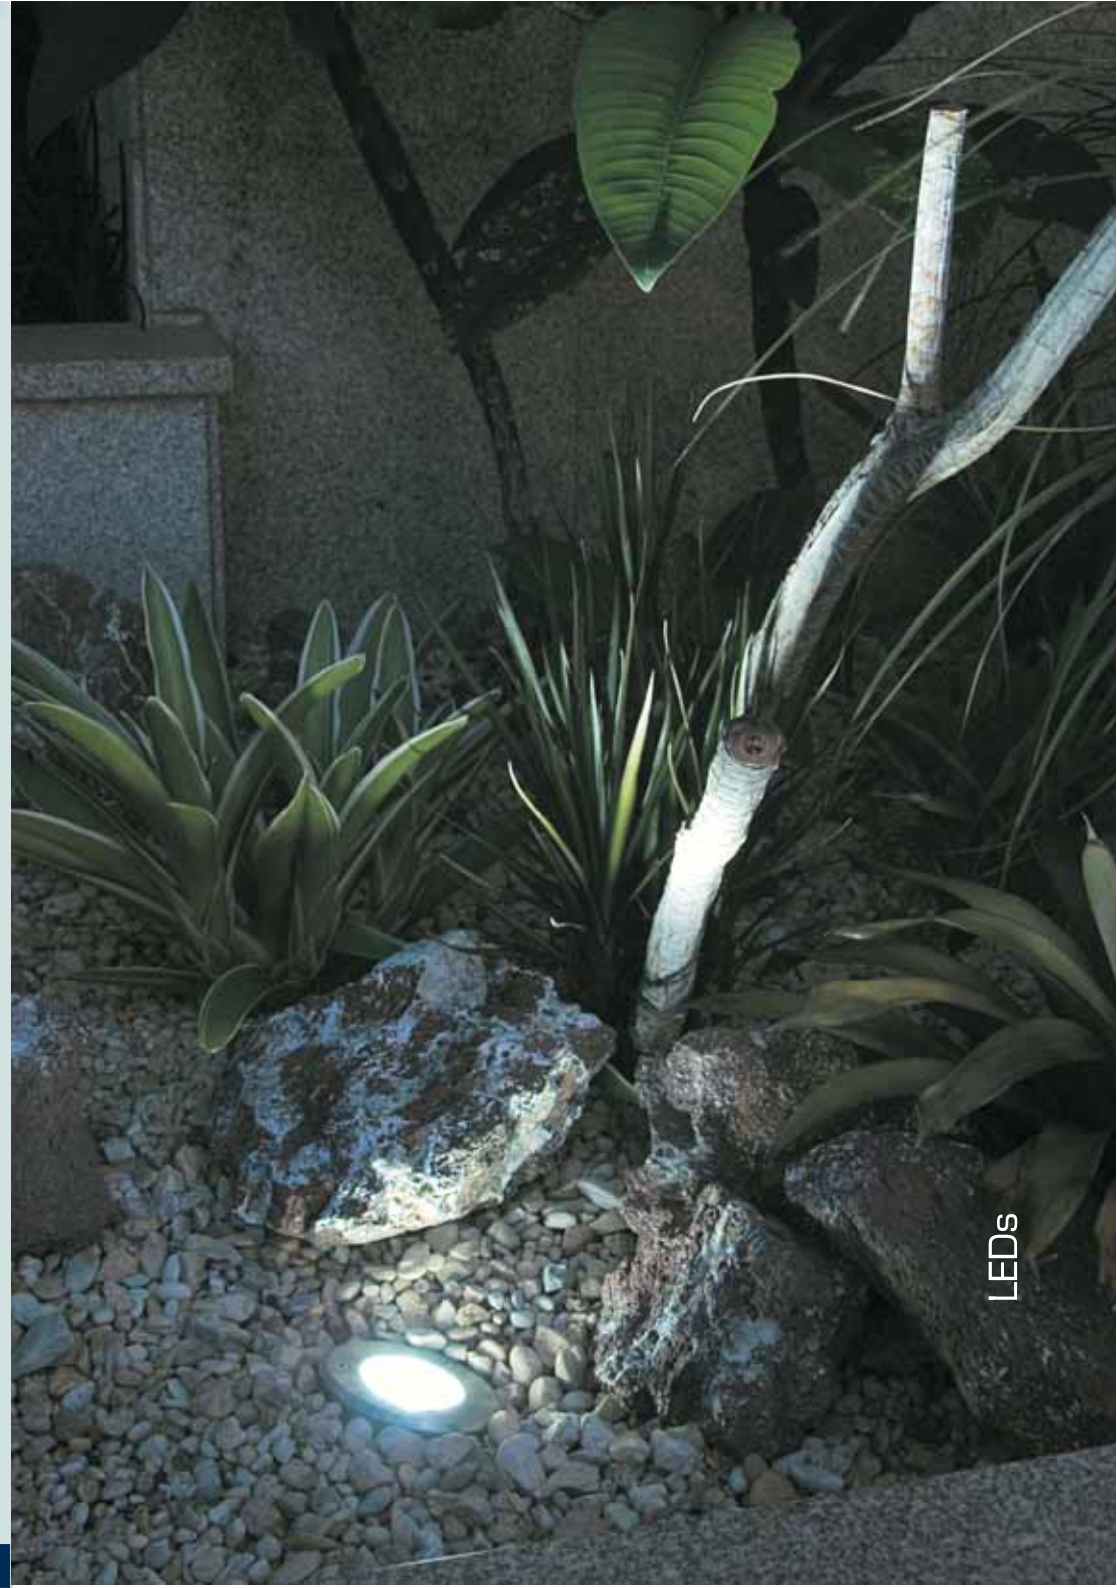

LEDs

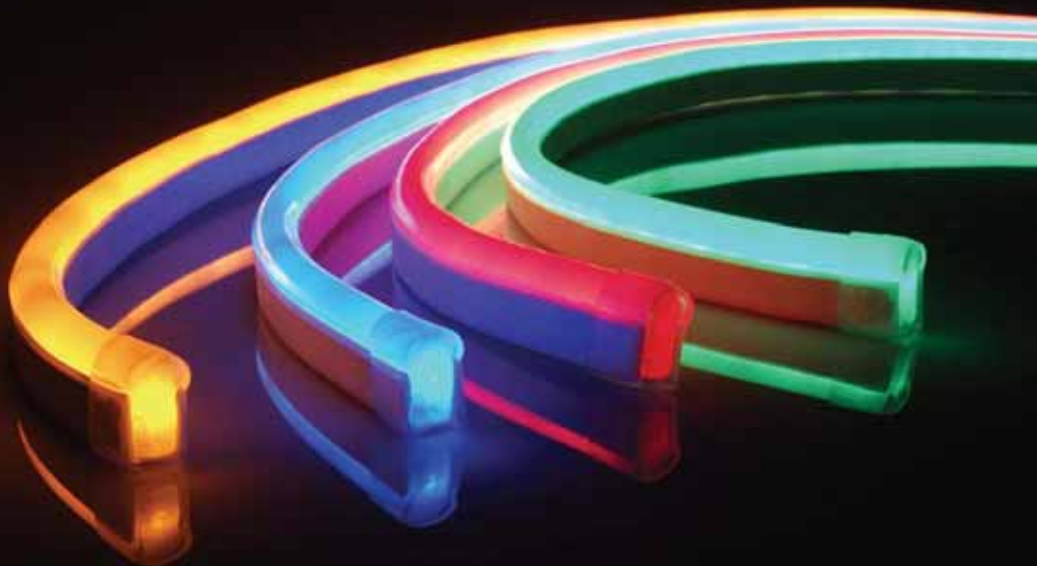

FlexiLED is a revolutionary product made with high efficiency LED bulbs. Compared with standard solutions, FlexiLED has much lower power consumption (three times lower than normal neon lights), it is shock resistant, very easy to install and to shape (as shown on picture)

Voltage	Colour	Dimension	Cut unit	Nr LED / Cut unit	Consumption / m	Max loading per Conversor
240V	Red	14 x 27.5 mm	1.52 m	120 LEDs	4.7W	58 m with conversor 1,6A
240V	Oranje	14 x 27.5 mm	1.52 m	120 LEDs	4.7W	58 m with conversor 1,6A
240V	Green	14 x 27.5 mm	0,91 m	72 LEDs	6.6W	58 m with conversor 1,6A
240V	Blue	14 x 27.5 mm	0,91 m	72 LEDs	6.6W	58 m with conversor 1,6A
24V	Red	14 x 27.5 mm	0.09 m	8 LEDs	6.5W	12 m with conversor 4A
24V	Oranje	14 x 27.5 mm	0.09 m	8 LEDs	6.5W	12 m with conversor 4A
24V	Green	14 x 27.5 mm	0.09 m	8 LEDs	7.1W	12 m with conversor 4A
24V	Blue	14 x 27.5 mm	0.09 m	8 LEDs	7.1W	12 m with conversor 4A

Accessories as option (as shown on page LD09)

INDEX

 slik Q.....pág. LD02

 slik R.....pág. LD02

 ultra.....pág. LD03

 soluz LED.....pág. LD04

 soluz Q LED.....pág. LD04

 soluz RGB.....pág. LD06

 slim LED.....pág. LD06

 elos.....pág. LD07

 lumi.....pág. LD07

 flexiLED.....pág. LD08

 flexiLED RGB.....pág. LD09

 alfa.....pág. LD09


soluz RGB




Stainless steel frame
Die-cast aluminum body



Static or continuous spectral colour change



Plastic sleeve



RGB control with pre-defined programs not included




slim LED




Stainless steel ring

- White LED
- Blue LED
- Red LED



Plastic sleeve

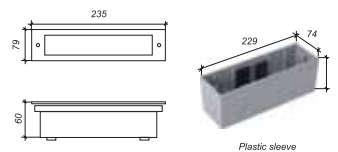

Plastic sleeve




Stainless steel frame
Die-cast aluminum body

- White LED
- Blue LED

ultra



soluz LED




Plastic sleeve

Stainless steel ring
Die-cast aluminum body

- White LED
- Blue LED
- Red LED




soluz Q LED




Plastic sleeve

Stainless steel frame
Die-cast aluminum body

- White LED
- Blue LED
- Red LED


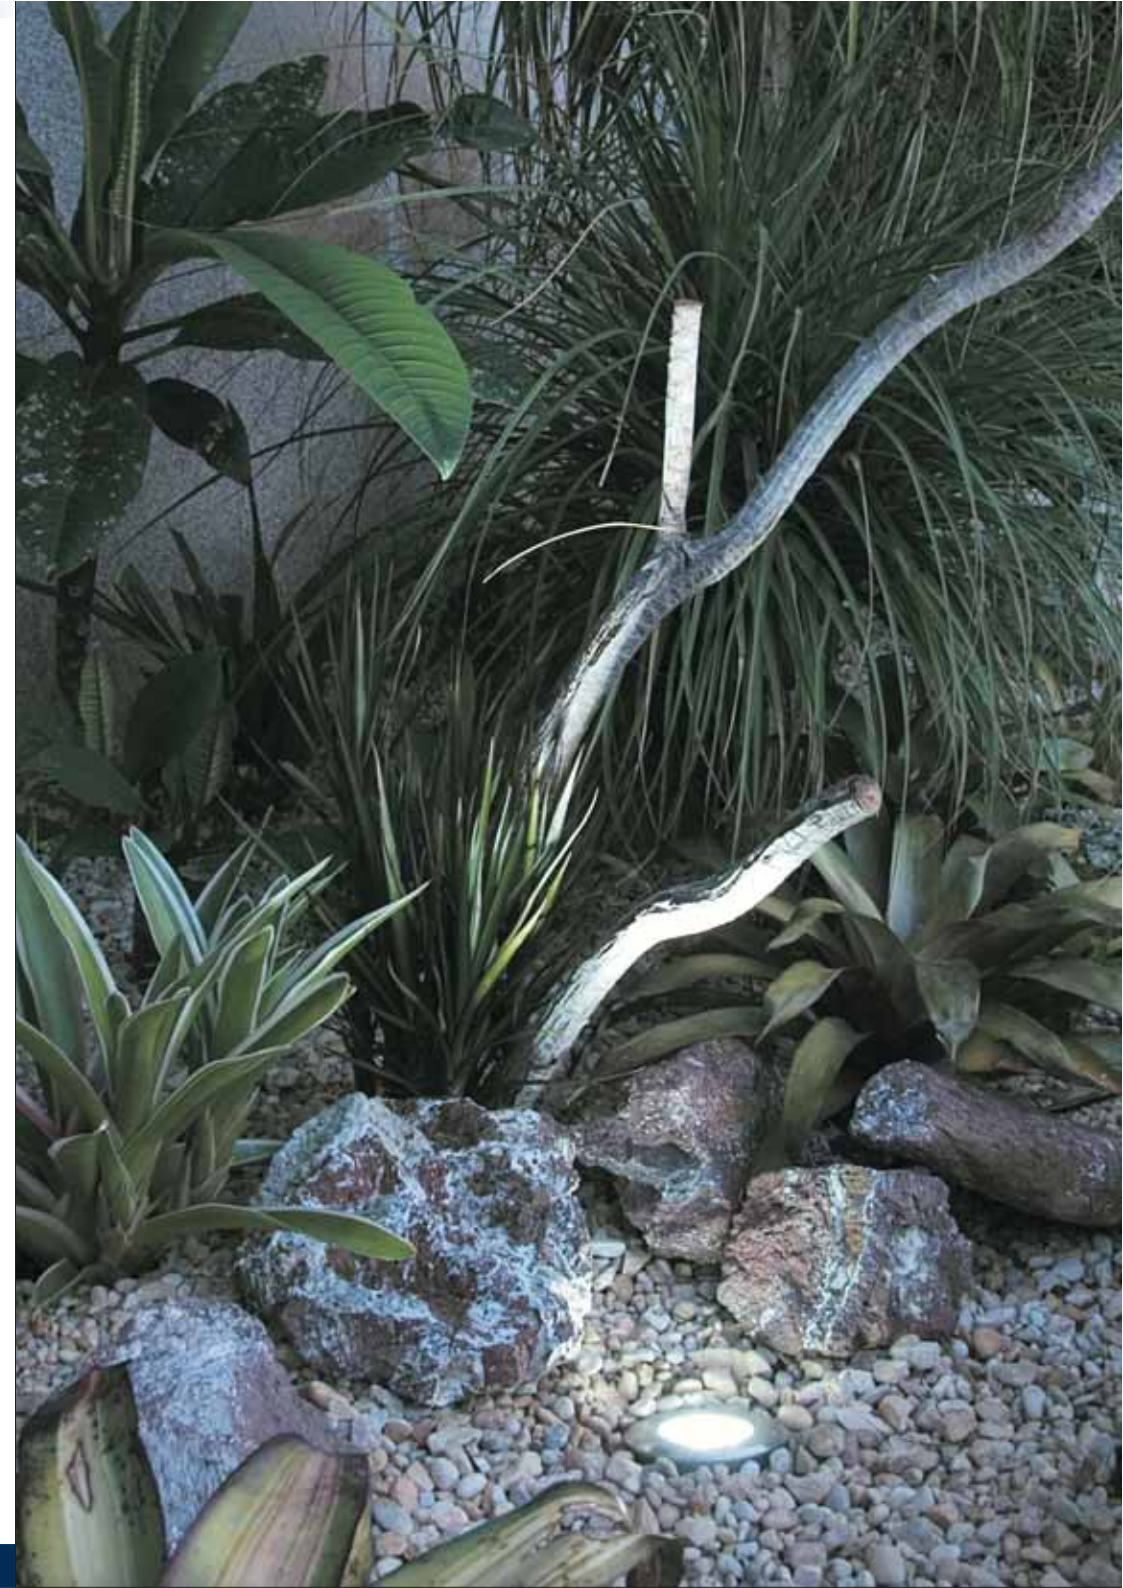


slik Q

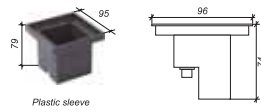

Stainless steel frame
Weather proof PVC body

- White LED
- Blue LED
- Red LED




elos



Stainless steel luminary



- White LED
- Blue LED
- Red LED

slik R

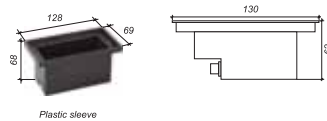

Stainless steel frame
Weather proof PVC body

- White LED
- Blue LED
- Red LED



Optional transformer (3 pieces max. for each transformer)

lumi



Sculpted aluminum luminary


- White LED
- Blue LED
- Red LED

Besides sharing FlexiLED unique specifications, FlexiLED RGB incorporates continuous spectral colour change technology without increasing significantly its dimension



Voltage	Colour	Nr LED / m	Consumption / m	Max loading per Converter
24V	RGB	180 LEDS	14,4W	20 m with converter SRC 191

alfa



Stainless steel luminary



- White LED
- Blue LED
- Red LED