



System 340 Lightwing

Modelos / Models

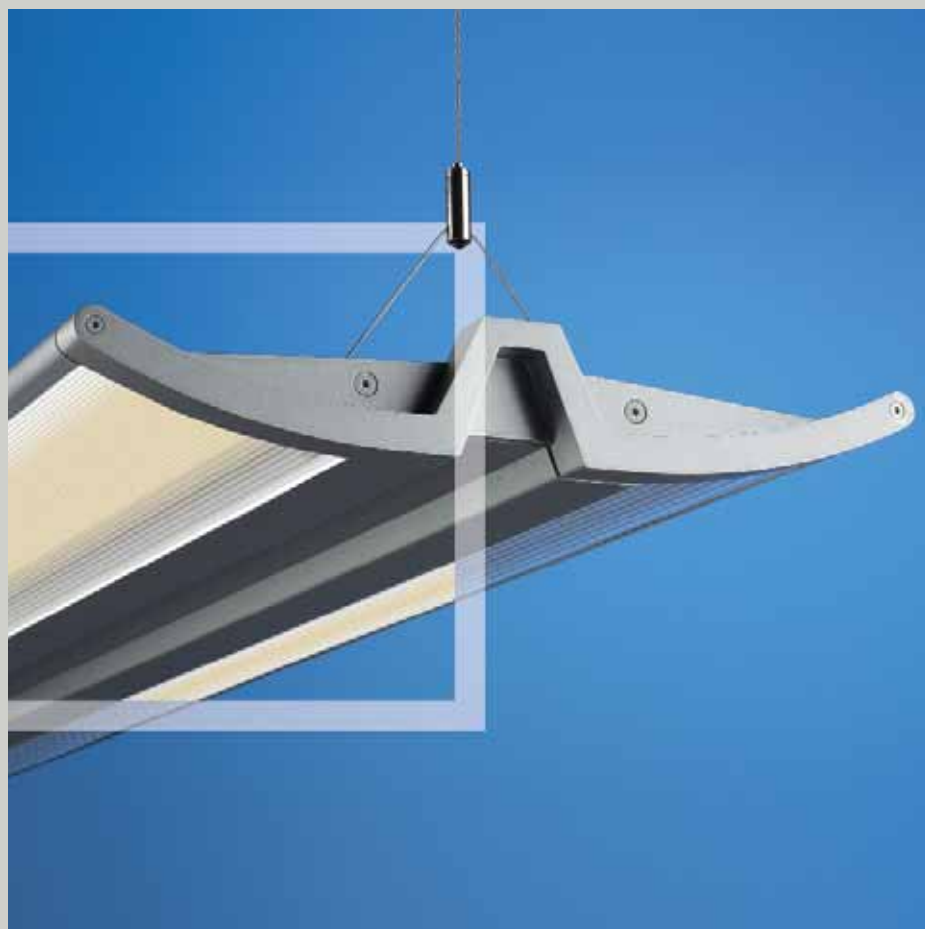

System 340 Lightwing

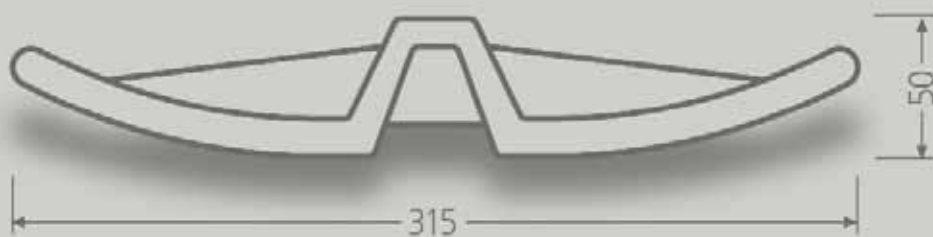

Luminaria suspendida Suspended luminaire

Accesorios Fittings	Longitud Length	Art. No. Art. No.
2 x 39W T16	900 mm	340.0010
2 x 54W T16	1200 mm	340.0011
2 x 49W T16	1500 mm	340.0012
2 x 80W T16	1500 mm	340.0013

Luminaria de pie Free-standing uplighting

Pie centrado Mast centred		Art. No. Art. No.
Accesorios Fittings	Peso Height	
4 x 55W TC-L	1850 mm	340.4020
Pie descentrado Mast off-set		Art. No. Art. No.
4 x 55W TC-L	1850 mm	340.100447

- Una nueva luminaria suspendida de aluminio y conductora de luz y luna de vidrio acrílico abovedada.

- Luz indirecta con lámparas fluorescentes T16 (T5) para iluminar el puesto de trabajo. Porción de luz reducida directa mediante las lunas conductoras de luz abovedadas

- Una apariencia fuera de lo común gracias a la transparencia constante de la luminaria. La transparencia de las lunas se mantiene aún cuando el sistema está apagado.

- Un claro trazado de línea aporta a la luminaria una fascinante dinámica tridimensional.

- Luminarias con balastro electrónico.

- Posibilidad de incorporar componentes para sistemas de control de luz o detectores de presencia.

- Suspensión de cable de acero en Y 600 mm, cable de conexión 3 x 0,752 flexible con dosel. Color de la luminaria plata RAL 9006.

- A new high-grade hanging aluminium luminaire with a curved special light-guiding acrylic glass screen.

- Indirect lighting with T16 (T5) fluorescent lamps for work area illumination. Reduced direct light ratio from the curved light-guiding screen.

- The luminaires constant transparency creates an extraordinary image. The transparency of the screen remains even when switched off.

- The clean lines of the luminaires present a fascinating 3-dimensional dynamism.

- Luminaires with electronic ballasts.

- Alternatively, lighting-control systems or presence detection components can be built in.

- Steel wire Y-suspension. Length, 600 mm. Connecting leads flexible, 3 x 0.75² with suspension cover. Luminaire colour; silver RAL 9006.